

DG330

Tripod Turnstile


Enables precise access detection
and secure control.

- Integrated design for smooth, quiet operation.
- Configurable for single or multiple-person access.
- Multiple access modes with flexible on-site configuration.
- Supports ticketing, QR access, facial recognition, billing, and attendance.



Tripod Turnstile

Dimensions

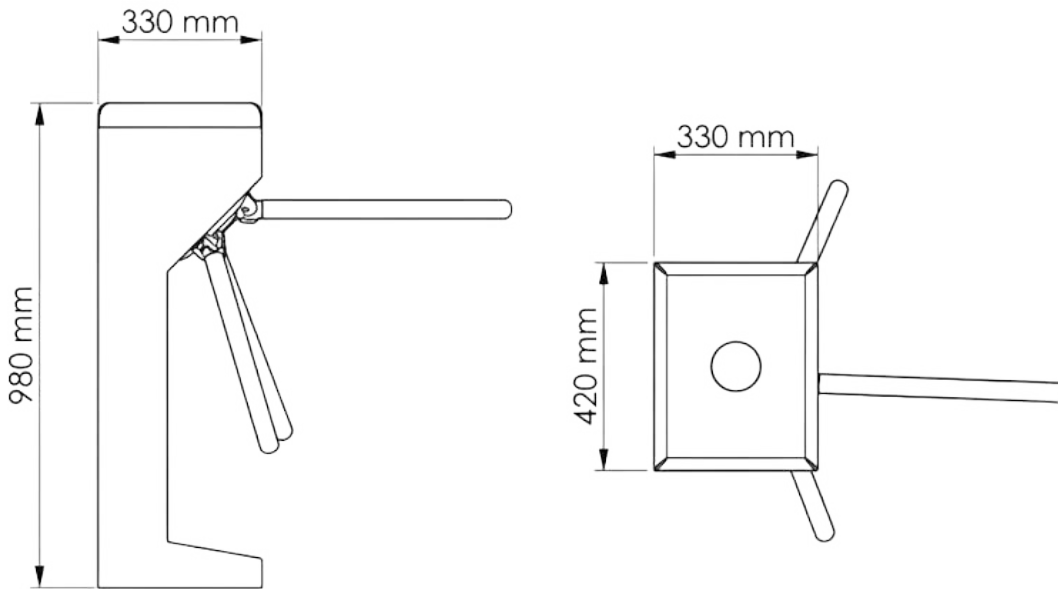

- Auto drop-arm function for emergency evacuation.
- Built-in controls for status, mode, and counter settings.
- Standard interface for access control integration and remote management.
- Adjustable gate speed with self-diagnostics for easy maintenance.

General specifications

Characteristic	Specification
Operating Voltage	AC220V $\pm 10\%$ V/ 50 $\pm 10\%$ Hz
Input Signal	Dry Contact, +12V Level or DC12V Pulse (≥ 100 ms), Drive Current ≥ 10 mA
Communication Interface	RS-232 / RS-485 / TCP/IP, Transmission Distance ≤ 1200 m
Passage Direction	One-way or Two-way
Throughput	30 Persons/min
Service Life	5 Million Cycles
Operating Environment	Indoor / Sheltered Outdoor
Material Thickness	Standard 1.5 mm, Optional 1.2 mm
Material	SUS 304 Stainless Steel
Operating Temperature	-20°C to 60°C
Relative Humidity	$\leq 90\%$
Passage Width	500mm
Dimensions (L $\times$ W $\times$ H)	420 x 330 x 980mm

