

HB0312


Reader I/O Controller

- Provides power to the reader and supports communication with access control readers.
- Provides 2 detection inputs and 3 relay dry-contact outputs for external control.
- Compact design for easy installation in a single-gang electrical box.



Reader I/O Controller

Equipment Configuration

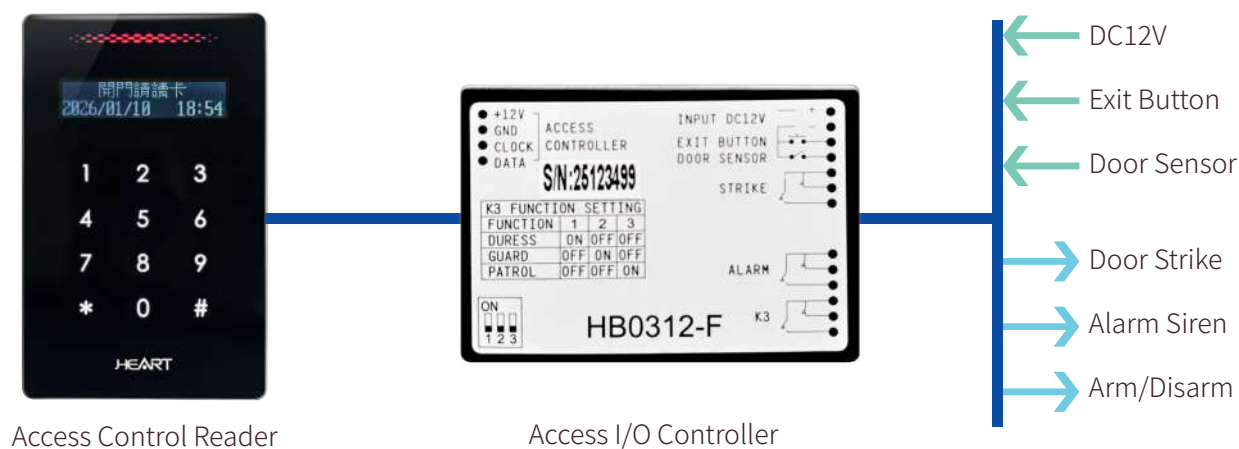

General specifications

Characteristic	Specification
Input	2 sets, (EXIT BUTTON / DOOR SENSOR)
Relay Output	3 sets, 24V DC, 3A, NC/NO (K1:STRIKE, K2:ALARM, K3: DURESS, GUARD, PATROL)
Material	Epoxy Resin
Operating Voltage	DC 10~15V
Current Consumption	300mA
Dimension (L x W x H)	45 x 64 x 10mm
Weight	90g
Operating Temperature	0°C ~ 50°C
Operating Humidity	5% ~ 90% (no condensation)

